



Range (mm)	A (mm)	B (inches)	C (mm)	Resolution (mm)	Accuracy (mm)
0-150	20	40	16	0.01	±0.03
0-200	24	50	19	0.01	±0.03
0-300	27	62	22	0.01	±0.03

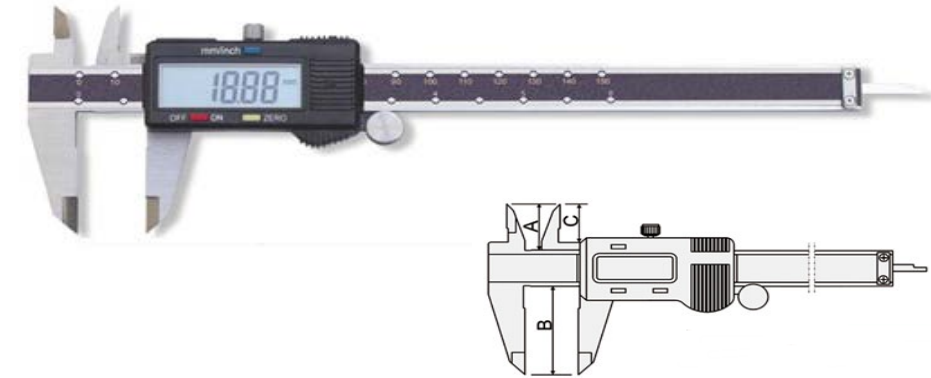

Digimatic caliper ,
hardened stainless steel

- *can measure OD,ID,depth with depth measuring bar and step.
- * large and clear LCD readout.
- *origin starting zero point setting at any slider position.
- *mm/inch conversion at any slider position.
- *manual (Auto) power ON/OFF.
- *battery: SR44 (or LR44), 1pc.
- *maximum response speed: Unlimited.
- *top locking screw.
- *with data output.


Range (mm)	A (mm)	B (inches)	C (mm)	Resolution (mm)	Accuracy (mm)
0-150	20	40	16	0.01	±0.03
0-200	24	50	19	0.01	±0.03
0-300	27	62	22	0.01	±0.03

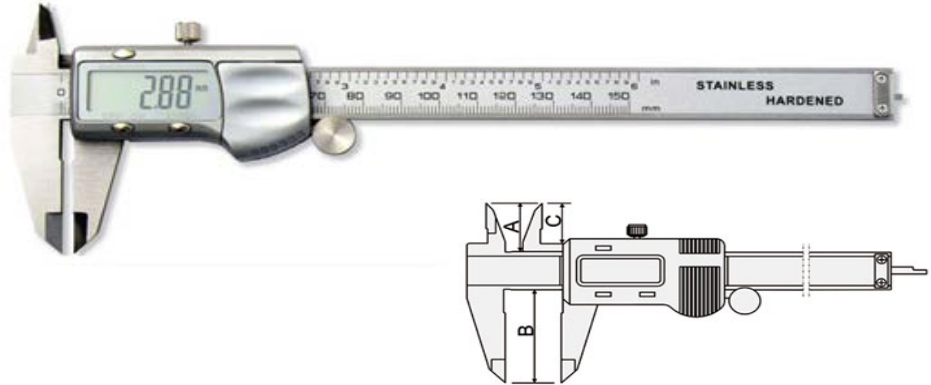

Digimatic caliper ,
hardened stainless steel

- *can measure OD,ID,depth with depth measuring bar and step.
- *large and clear LCD readout.
- *origin starting zero point setting at any slider position.
- *mm/inch conversion at any slider position.
- *manual (Auto) power ON/OFF.
- *battery: SR44 (or LR44), 1pc.
- *maximum response speed: Unlimited.
- *top locking screw.


Range (mm)	A (mm)	B (inches)	C (mm)	Resolution (mm)	Accuracy (mm)
0-150	20	40	16	0.01	±0.03
0-200	24	50	19	0.01	±0.03
0-300	27	62	22	0.01	±0.03

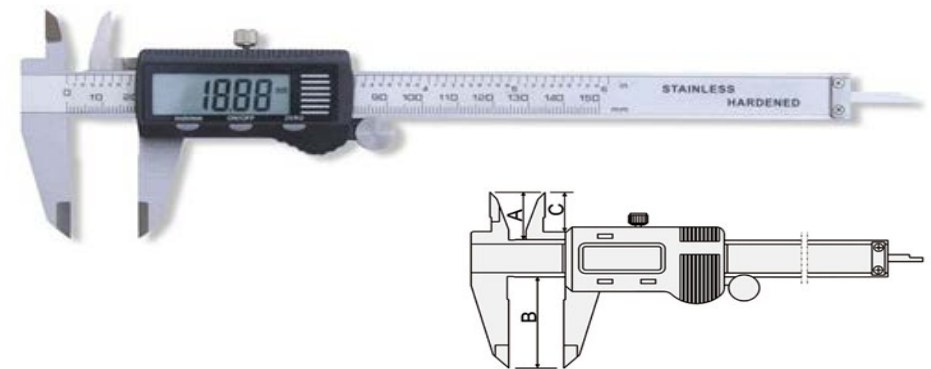

Digimatic caliper ,
hardened stainless steel

- *can measure OD,ID,depth with depth measuring bar and step.
- *large and clear LCD readout.
- *origin starting zero point setting at any slider position.
- *mm/inch conversion at any slider position.
- *manual (Auto) power ON/OFF.
- *battery: SR44 (or LR44), 1pc.
- *maximum response speed: Unlimited.
- *top locking screw.


Range (mm)	A (mm)	B (inches)	C (mm)	Resolution (mm)	Accuracy (mm)
0-150	20	40	16	0.01	±0.03
0-200	24	50	19	0.01	±0.03
0-300	27	62	22	0.01	±0.03

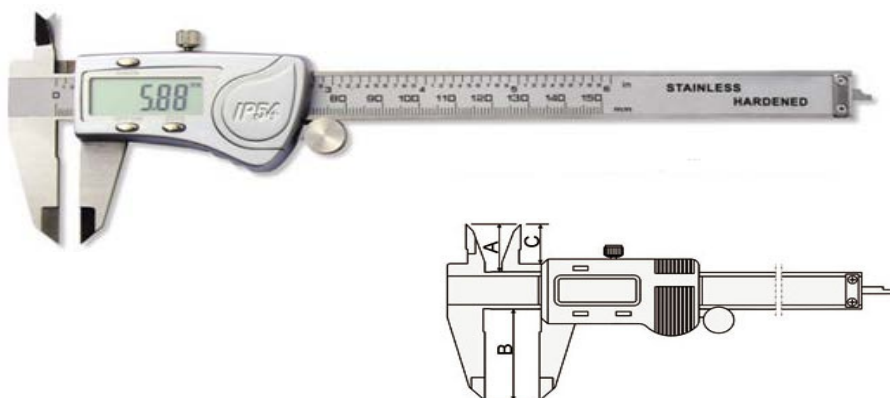

Digimatic caliper, hardened stainless steel

- *dust/water protection level : IP54.
- *can measure OD,ID,depth with depth measuring bar and step.
- * large and clear LCD readout.
- *origin starting zero point setting at any slider position.
- *mm/inch conversion at any slider position.
- *manual (Auto) power ON/OFF.
- *battery: SR44 (or LR44), 1pc.
- *maximum response speed: Unlimited.
- *top locking screw.


Range (mm)	A (mm)	B (inches)	C (mm)	Resolution (mm)	Accuracy (mm)
0-150	21	40	16	0.01	±0.03
0-200	24	50	19	0.01	±0.03
0-300	25	60	20	0.01	±0.03

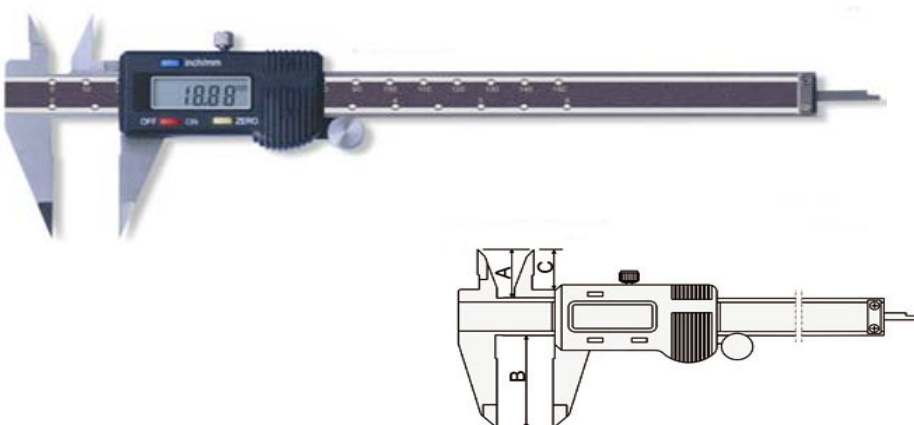

Digimatic caliper with point jaws, hardened stainless steel

- *point jaws type for measuring hard-to-reach dimension.
- *can measure OD,ID,depth with depth measuring bar and step.
- *large and clear LCD readout.
- *origin starting zero point setting at any slider position.
- *mm/inch conversion at any slider position.
- *manual (Auto) power ON/OFF.
- *battery: SR44 (or LR44), 1pc.
- *maximum response speed: Unlimited.
- *top locking screw.
- *with data output.


Range (mm)	A (mm)	B (inches)	C (mm)	Resolution (mm)	Accuracy (mm)
0-150	21	40	16.5	0.01	±0.03
0-200	24	50	19.5	0.01	±0.03
0-300	25	60	20.5	0.01	±0.03

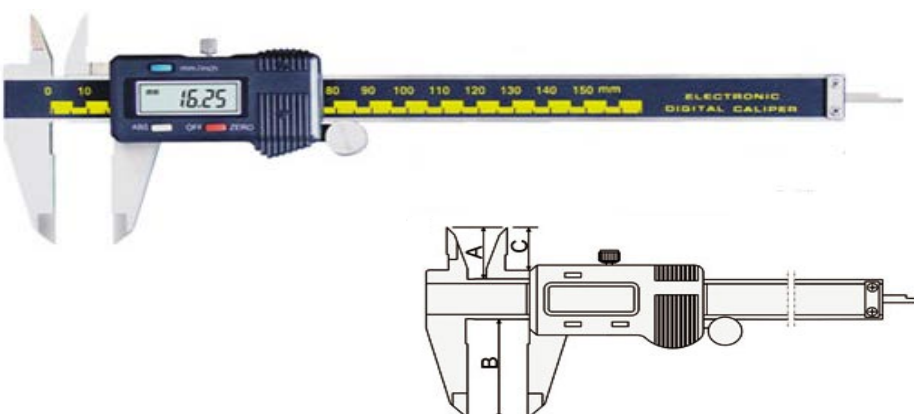

Digimatic caliper with ABS, hardened stainless steel

- *ABS type for absolute and incremental measurement conversion at any slider position.
- *can measure OD,ID,depth with depth measuring bar and step.
- *large and clear LCD readout.
- *origin starting zero point setting at any slider position.
- *mm/inch conversion at any slider position.
- *manual (Auto) power ON/OFF.
- *battery: SR44 (or LR44), 1pc.
- *maximum response speed: Unlimited.
- *top locking screw.
- *with data output.


Range (mm)	A (mm)	B (inches)	C (mm)	Resolution (mm)	Accuracy (mm)
0-150	21	40	16.5	0.01	±0.03
0-200	24	50	19.5	0.01	±0.03
0-300	25	60	20.5	0.01	±0.03

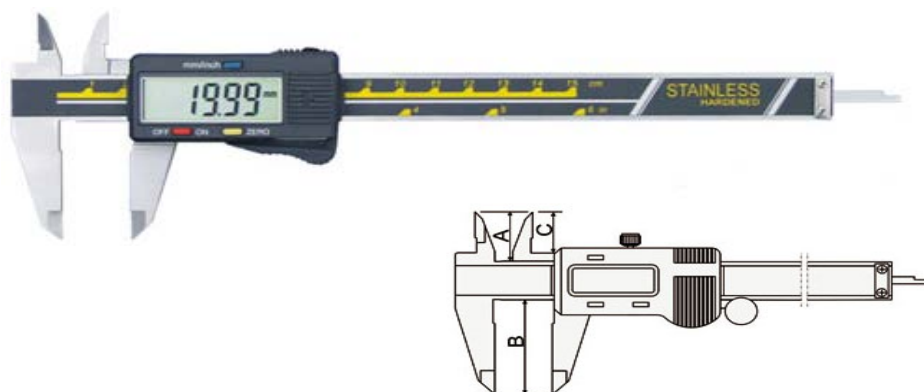

Digital caliper with auto lock, hardened stainless steel

- *can measure OD,ID,depth with depth measuring bar and step.
- * large and clear LCD readout.
- *origin starting zero point setting at any slider position.
- *mm/inch conversion at any slider position.
- *manual (Auto) power ON/OFF.
- *battery: SR44 (or LR44), 1pc.
- *maximum response speed: Unlimited.
- *with thumb clamp.
- *with data output.


Range (mm)	A (mm)	B (inches)	C (mm)	Resolution (mm)	Accuracy (mm)
0-150	28	40	23.5	0.005	±0.03
0-200	28	50	23.5	0.005	±0.03
0-300	28	60	23.5	0.005	±0.04

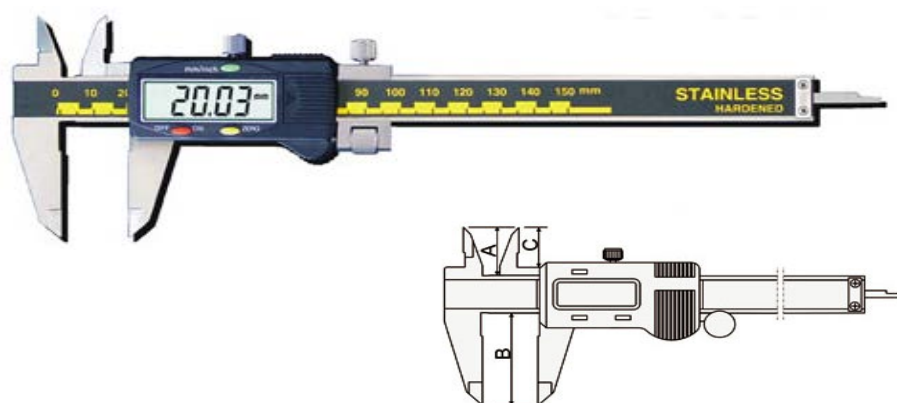

Digital caliper with fine adjustment, hardened stainless steel

- *can measure OD,ID,depth with depth measuring bar and step.
- *large and clear LCD readout.
- *origin starting zero point setting at any slider position.
- *mm/inch conversion at any slider position.
- *manual (Auto) power ON/OFF.
- *battery: SR44 (or LR44), 1pc.
- *maximum response speed: Unlimited.
- *top locking screw.
- *with data output.

Range (mm)	A (mm)	B (inches)	C (mm)	Resolution (mm)	Accuracy (mm)
0-150	21	40	16.5	0.005	±0.015
0-200	24	50	19.5	0.005	±0.02
0-300	25	60	20.5	0.005	±0.025

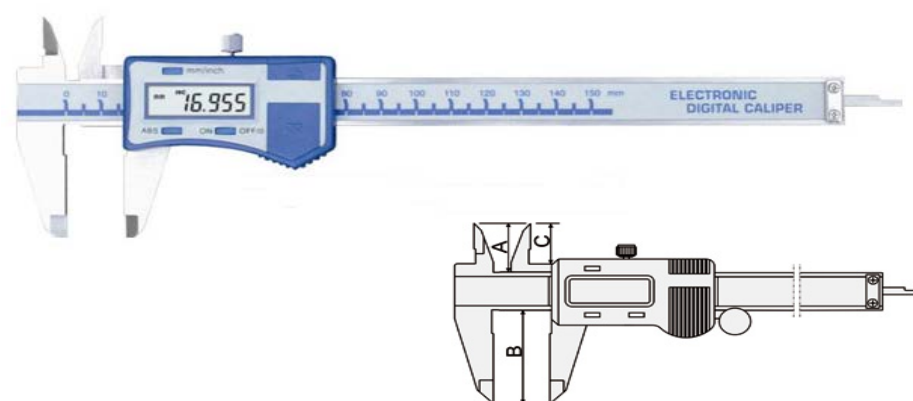

Digital caliper with high precision, hardened stainless steel

- *can measure OD,ID,depth with depth measuring bar and step.
- *large and clear LCD readout.
- *origin starting zero point setting at any slider position.
- *mm/inch conversion at any slider position.
- *manual (Auto) power ON/OFF.
- *battery: SR44 (or LR44), 1pc.
- *maximum response speed: Unlimited.
- *top locking screw.
- *with data output.