



| Range<br>(mm) | a<br>(mm) | b<br>(mm) | c<br>(mm) | Graduation<br>( mm) | Accuracy<br>( mm) |
|---------------|-----------|-----------|-----------|---------------------|-------------------|
| 0-100         | 30        | 18/17     | 14/13     | 0.02                | ±0.02             |
| 0-100         | 30        | 18/17     | 14/13     | 0.05                | ±0.05             |
| 0-150         | 40        | 22/20     | 17.5/16   | 0.02                | ±0.02             |
| 0-150         | 40        | 22/20     | 17.5/16   | 0.05                | ±0.05             |
| 0-200         | 46/50     | 23        | 19/18     | 0.02                | ±0.03             |
| 0-200         | 46/50     | 23        | 19/18     | 0.05                | ±0.05             |
| 0-300         | 62/55     | 31/26     | 25/20     | 0.02                | ±0.05             |
| 0-300         | 62/55     | 31/26     | 25/20     | 0.05                | ±0.08             |

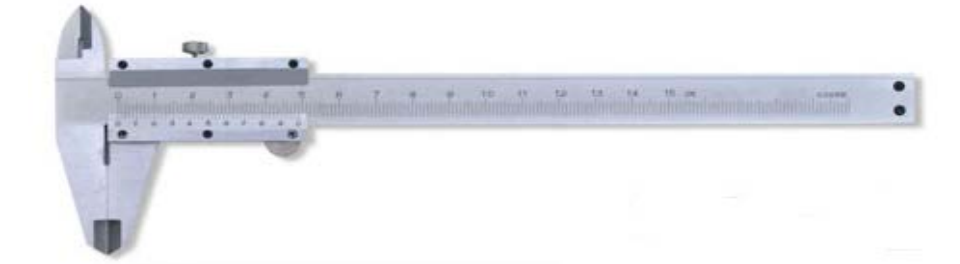

**Vernier caliper, screwed version, carbon steel or stainless steel**

- \*vernier caliper with screw frame slider, has the virtue of its repairable worn measuring faces and budged verniers and long-life, but its verniers are easily budged when bumped, which causes reading error.
- \*can measure OD,ID,depth with depth measuring bar and step.
- \*laser inscription, quite clear and easily read.
- \*top locking screw type or thumb clamp type optional, easily use.




| Range<br>(mm) | a<br>(mm) | b<br>(mm) | c<br>(mm) | Graduation<br>( mm) | Accuracy<br>( mm) |
|---------------|-----------|-----------|-----------|---------------------|-------------------|
| 0-75          | 19        | 10        | 8         | 0.02                | ±0.02             |
| 0-75          | 19        | 10        | 8         | 0.05                | ±0.05             |
| 0-100         | 30        | 17        | 13        | 0.02                | ±0.02             |
| 0-100         | 30        | 17        | 13        | 0.05                | ±0.05             |
| 0-150         | 40        | 20        | 16        | 0.02                | ±0.02             |
| 0-150         | 40        | 20        | 16        | 0.05                | ±0.05             |
| 0-200         | 50        | 23        | 18        | 0.02                | ±0.03             |
| 0-200         | 50        | 23        | 18        | 0.05                | ±0.05             |
| 0-300         | 64        | 27        | 21        | 0.02                | ±0.05             |
| 0-300         | 64        | 27        | 21        | 0.05                | ±0.08             |




**Vernier caliper, mono-block version, stainless steel**


- \*vernier caliper with mono -block frame slider, has the virtue of its unmovable verniers when bumped, but it can not be repaired due to its non-adjustable mono-block verniers when its measuring faces are worn, which is quite wasteful of resources.
- \*can measure OD,ID,depth with depth measuring bar and step.
- \*laser inscription, quite clear and easily read.
- \*top locking screw type or thumb clamp type optional, easily use.



| Range<br>(mm) | a<br>(mm)       | b<br>(mm)   | e<br>(mm) | f<br>(mm)    | Graduation<br>(mm) | Accuracy<br>(mm) |
|---------------|-----------------|-------------|-----------|--------------|--------------------|------------------|
| 0-200         | 60/75/90        | 40          | 5         | 12           | 0.02               | ±0.03            |
| 0-200         | 60/75/90        | 40          | 5         | 12           | 0.05               | ±0.05            |
| 0-250         | 60/75/90        | 40          | 5         | 12           | 0.02               | ±0.05            |
| 0-250         | 60/75/90        | 40          | 5         | 12           | 0.05               | ±0.08            |
| 0-300         | 60/90/100/125   | 40/40/56/56 | 5/5/10/10 | 12/12/18/18/ | 0.02               | ±0.04            |
| 0-300         | 60/90/100/125   | 40/40/56/56 | 5/5/10/10 | 12/12/18/18/ | 0.05               | ±0.08            |
| 0-400         | 100/125/150     | 56/56/57    | 10        | 18/18/24     | 0.02               | ±0.05            |
| 0-400         | 100/125/150     | 56/56/57    | 10        | 18/18/24     | 0.05               | ±0.08            |
| 0-500         | 100/150/200     | 56/56/57    | 10        | 18/18/24     | 0.02               | ±0.05            |
| 0-500         | 100/150/200     | 56/56/57    | 10        | 18/18/24     | 0.05               | ±0.08            |
| 0-600         | 100/150/200     | 56/56/57    | 10        | 18/18/24     | 0.02               | ±0.07            |
| 0-600         | 100/150/200     | 56/56/57    | 10        | 18/18/24     | 0.05               | ±0.10            |
| 0-800         | 150/200/250     | 67/67/80    | 10        | 24           | 0.02               | ±0.07            |
| 0-800         | 150/200/250     | 67/67/80    | 10        | 24           | 0.05               | ±0.10            |
| 0-1000        | 150/200/250/300 | 67/67/80/80 | 10        | 24           | 0.02               | ±0.07            |
| 0-1000        | 150/200/250/300 | 67/67/80/80 | 10        | 24           | 0.05               | ±0.10            |
| 0-1500        | 150/200/250/300 | 80          | 10        | 24           | 0.02               | ±0.10            |
| 0-1500        | 150/200/250/300 | 80          | 10        | 24           | 0.05               | ±0.15            |
| 0-2000        | 150/200/250/300 | 80          | 10        | 24           | 0.02               | ±0.14            |
| 0-2000        | 150/200/250/300 | 80          | 10        | 24           | 0.05               | ±0.20            |
| 0-2500        | 150/200/250/300 | 80          | 10        | 24           | 0.02               | ±0.18            |
| 0-2500        | 150/200/250/300 | 80          | 10        | 24           | 0.05               | ±0.25            |
| 0-3000        | 150/200/250/300 | 80          | 10        | 24           | 0.02               | ±0.22            |
| 0-3000        | 150/200/250/300 | 80          | 10        | 24           | 0.05               | ±0.30            |

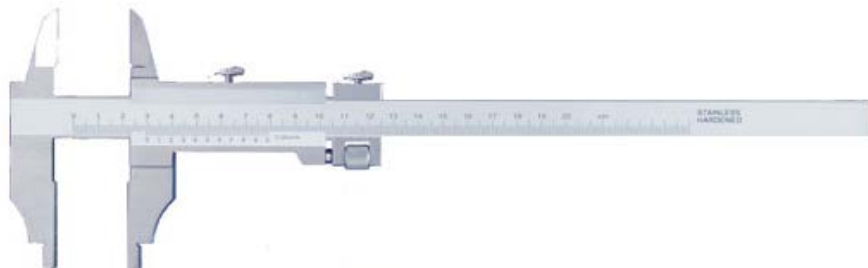


| Range<br>(mm) | a<br>(mm)     | b<br>(mm)    | e<br>(mm) | f<br>(mm)   | Graduation<br>(mm) | Accuracy<br>(mm) |
|---------------|---------------|--------------|-----------|-------------|--------------------|------------------|
| 0-200         | 60            | 22           | 5         | 10          | 0.02               | ±0.03            |
| 0-200         | 60            | 22           | 5         | 10          | 0.05               | ±0.05            |
| 0-300         | 60/90/100/125 | 38/42/45/45  | 5/5/10/10 | 12/12/18/18 | 0.02               | ±0.04            |
| 0-300         | 60/90/100/125 | 38/42/45/45  | 5/5/10/10 | 12/12/18/18 | 0.05               | ±0.08            |
| 0-400         | 100/125/150   | 45/45/60     | 10        | 18/18/24    | 0.02               | ±0.05            |
| 0-400         | 100/125/150   | 45/45/60     | 10        | 18/18/24    | 0.05               | ±0.08            |
| 0-500         | 100/150/200   | 60/45/60     | 10        | 24/18/25    | 0.02               | ±0.05            |
| 0-500         | 100/150/200   | 60/45/60     | 10        | 24/18/25    | 0.05               | ±0.08            |
| 0-600         | 100/150/200   | 45/60/45     | 10        | 18/24/18    | 0.02               | ±0.07            |
| 0-600         | 100/150/200   | 45/60/45     | 10        | 18/24/18    | 0.05               | ±0.10            |
| 0-800         | 150/200/250   | 45/60/60     | 10        | 18/24/18    | 0.02               | ±0.07            |
| 0-800         | 150/200/250   | 45/60/60     | 10        | 18/24/18    | 0.05               | ±0.10            |
| 0-1000        | 150/200       | 60/60        | 10        | 24          | 0.02               | ±0.07            |
| 0-1000        | 150/200       | 60/60        | 10        | 24          | 0.05               | ±0.10            |
| 0-1500        | 125/150/200   | 47/54.5/54.5 | 10        | 20          | 0.02               | ±0.10            |
| 0-1500        | 125/150/200   | 47/54.5/54.5 | 10        | 20          | 0.05               | ±0.15            |
| 0-2000        | 150/200/300   | 54/54/54     | 10        | 20          | 0.02               | ±0.14            |
| 0-2000        | 150/200/300   | 54/54/54     | 10        | 20          | 0.05               | ±0.20            |

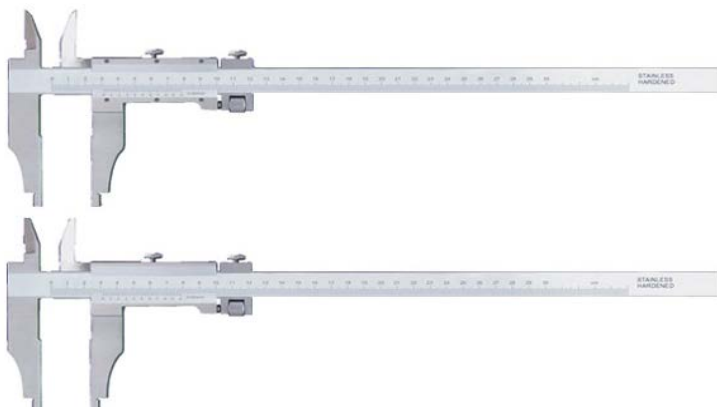


**vernier caliper with nib style and standard jaws, screwed version or mono-block version, stainless steel or carbon steel**

\*can measure OD,ID,depth with depth measuring bar and step ; round edge jaws make the internal measurement more accurate ; long jaws for measuring hard-to-reach positions.  
\*laser inscription, quite clear and easily read.  
\*top locking screw type.

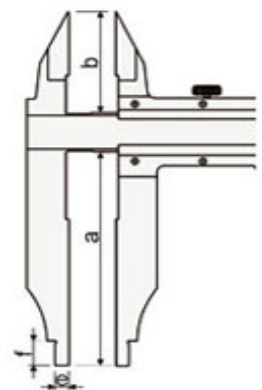

**vernier caliper with nib style and standard jaws, screwed version or mono-block version, stainless steel or carbon steel**

\*can measure OD,ID ; round edge jaws make the internal measurement more accurate ; long jaws for measuring hard-to-reach positions.  
\*laser inscription, quite clear and easily read.  
\*top locking screw type.

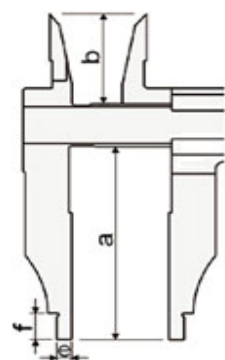


| Range<br>(mm) | a<br>(mm)       | b<br>(mm) | c<br>(mm)   | Graduation<br>(mm) | Accuracy<br>(mm) |
|---------------|-----------------|-----------|-------------|--------------------|------------------|
| 0-200         | 65/80/100/125   | 5/5/10/10 | 12/12/18/18 | 0.02               | ±0.03            |
| 0-200         | 65/80/100/125   | 5/5/10/10 | 12/12/18/18 | 0.05               | ±0.05            |
| 0-250         | 65/80/100/125   | 5/5/10/10 | 12/12/18/18 | 0.02               | ±0.05            |
| 0-250         | 65/80/100/125   | 5/5/10/10 | 12/12/18/18 | 0.05               | ±0.08            |
| 0-300         | 65/90/125/150   | 5/5/10/10 | 12/12/18/18 | 0.02               | ±0.04            |
| 0-300         | 65/90/125/150   | 5/5/10/10 | 12/12/18/18 | 0.05               | ±0.08            |
| 0-400         | 100/125/150     | 10        | 18/18/24    | 0.02               | ±0.05            |
| 0-400         | 100/125/150     | 10        | 18/18/24    | 0.05               | ±0.08            |
| 0-500         | 100/150/200     | 10        | 18/24/24    | 0.02               | ±0.05            |
| 0-500         | 100/150/200     | 10        | 18/24/24    | 0.05               | ±0.08            |
| 0-600         | 100/150/200     | 10        | 18/24/24    | 0.02               | ±0.07            |
| 0-600         | 100/150/200     | 10        | 18/24/24    | 0.05               | ±0.10            |
| 0-800         | 150/200/250     | 10        | 24          | 0.02               | ±0.07            |
| 0-800         | 150/200/250     | 10        | 24          | 0.05               | ±0.10            |
| 0-1000        | 150/200/250/300 | 10        | 24          | 0.02               | ±0.07            |
| 0-1000        | 150/200/250/300 | 10        | 24          | 0.05               | ±0.10            |
| 0-1500        | 150/200/250/300 | 10        | 24          | 0.02               | ±0.10            |
| 0-1500        | 150/200/250/300 | 10        | 24          | 0.05               | ±0.15            |
| 0-2000        | 150/200/250/300 | 10        | 24          | 0.02               | ±0.14            |
| 0-2000        | 150/200/250/300 | 10        | 24          | 0.05               | ±0.20            |
| 0-2500        | 150/200/250/300 | 10        | 24          | 0.02               | ±0.18            |
| 0-2500        | 150/200/250/300 | 10        | 24          | 0.05               | ±0.25            |
| 0-3000        | 150/200/250/300 | 10        | 24          | 0.02               | ±0.22            |
| 0-3000        | 150/200/250/300 | 10        | 24          | 0.05               | ±0.30            |




**Vernier caliper with nib style, screwed version or mono-block version, stainless steel or carbon steel**

- \*can measure OD,ID ; round edge jaws make the internal measurement more accurate.
- \*long jaws for measuring hard-to-reach positions.
- \*laser inscription, quite clear and easily read.
- \*top locking screw type.

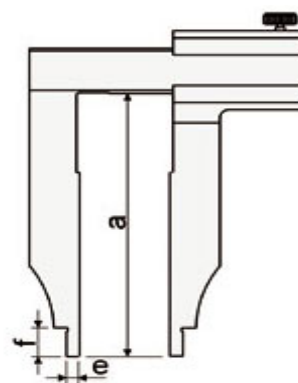

| Range<br>(mm) | a<br>(mm) | b<br>(mm) | c<br>(mm) | L<br>(mm) | Graduation<br>(mm) | Accuracy<br>(mm) |
|---------------|-----------|-----------|-----------|-----------|--------------------|------------------|
| 0-150         | 40        | 21        | 16.5      | 236       | 0.02               | ±0.02            |
| 0-150         | 40        | 21        | 16.5      | 236       | 0.05               | ±0.05            |
| 0-200         | 50        | 24        | 19.5      | 286       | 0.02               | ±0.03            |
| 0-200         | 50        | 24        | 19.5      | 286       | 0.05               | ±0.05            |
| 0-300         | 60        | 26        | 21.5      | 400       | 0.02               | ±0.05            |
| 0-300         | 60        | 26        | 21.5      | 400       | 0.05               | ±0.08            |

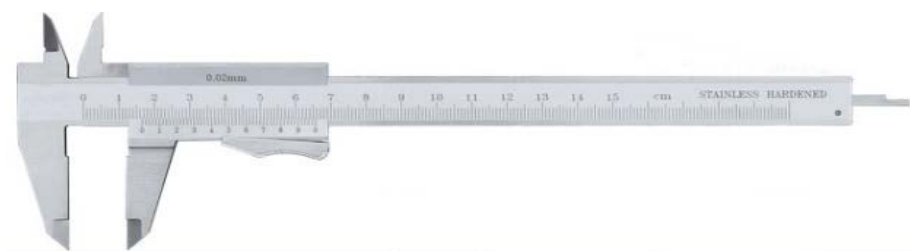

**Vernier caliper, mono-block version, carbon steel or stainless steel**

- \*auto self locking thumb clamp.
- \*can measure OD,ID,depth with depth measuring bar and step.
- \*laser inscription, quite clear and easily read.

