

Item No.	Width(mm)	Thickness(mm)	Length(m)
HT1910	19	0.18	10



Teflon tape

- *High temperature resistance
- *Clear


Item No.	Width(mm)	Thickness(mm)	Length(m)
HT255	25	0.7	5



3M insulating waterproof self-adhesive tape

- *Electrical insulation tape in a range of fade-resistant colours, provides moisture-tight electrical and mechanical protection with minimum bulk

Item No.	Width(mm)	Thickness(mm)	Length(m)
HT255B	25	0.7	5

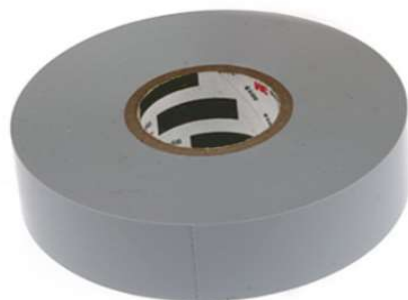

3M insulating waterproof self-adhesive tape

- *Electrical insulation tape in a range of fade-resistant colours, provides moisture-tight electrical and mechanical protection with minimum bulk

Item No.	Width(mm)	Thickness(mm)	Length(m)
HT551033	5-510	0.05	33-100



PI insulating tape

*Electrical insulation tape in a range of fade-resistant colours, provides moisture-tight electrical and mechanical protection with minimum bulk

Item No.	Width(mm)	Thickness(mm)	Length(m)
HT10150	10	0.8	150



Anti-slip tape A

*Reduces the risk of accidents on slippery uneven or split-level floor surfaces.
*High quality abrase on pvc carrier with aggressive solvent-based adhesive

Item No.	Width(mm)	Thickness(mm)	Length(m)
HT5018	50	0.8	18



Anti-slip tape B

*Reduces the risk of accidents on slippery uneven or split-level floor surfaces.
*High quality abrase on pvc carrier with aggressive solvent-based adhesive

Item No.	Width(mm)	Thickness(mm)	Length(m)
HT4814	48	0.13	14



Warning tape A

*Use for lane marking,floor marking,safety coding,hazard marking.

Item No.	Width(mm)	Thickness(mm)	Length(m)
HT4814	48	0.13	14



Warning tape B

*Use for lane marking,floor marking,safety coding,hazard marking.

Item No.	Width(mm)	Thickness(mm)	Length(m)
HT1826	18	0.045	26



Warning tape C

*Use for lane marking,floor marking,safety coding,hazard marking.

Item No.	Width(mm)	Thickness(mm)	Length(m)
HT1826	18	0.045	26



Warning tape D

*Use for lane marking, floor marking, safety coding, hazard marking.

Item No.	Width(mm)	Thickness(mm)	Length(m)
HT2550	25	0.14	50
HT3850	38	0.14	50
HT5050	50	0.14	50
HT7550	75	0.14	50



Masking tape

*Crepe aper masking tape with synthetic rubber adhesive designed for everyday room temperature masking and holding applications.

Item No.	Width(mm)	Thickness(mm)	Length(m)
HT2550	25	0.15	50



UV resistant masking tape

*Premium grade 14-day clean removal masking tape. fine structure crepe-backed, pressure-sensitive tape with adhesive formulated for exposure to direct sunlight for up to 14 days with easy and clean removed from most surfaces.

Item No.	Width(mm)	Thickness(mm)	Length(m)
HT4810	48	0.28	10-15



Duct tape

*Use in situations that require a strong,flexible,waterproof and very sticky tape,with a long-lasting adhesive and resistance to weathering.

Item No.	Width(mm)	Thickness(mm)	Length(m)
HT5050	50	0.2	50
HT7250	72	0.2	50
HT5020	50	0.2	20



Duct tape

*Use in situations that require a strong,flexible,waterproof and very sticky tape,with a long-lasting adhesive and resistance to weathering.

Item No.	Width(mm)	Thickness(mm)	Length(m)
HT502050	50-100	0.05-1.4	20-50



Aluminum foil tape

*Aluminium foil tape on silicon paper liner for use on most surfaces,aggressive acrylic-based adhesive, flame retardant and excellent temperature performance.

Item No.	Width(mm)	Thickness(mm)	Length(m)
HT2525	25	0.26	2.5
HT5025	50	0.26	2.5



Double sided tape

*Super hold, double-side tape is a super-strong, hot melt adhesive on glass fibre mesh carrier.
 *Use in high performance bonds where in most cases the tape can replace rivets, welds, liquid adhesives and fasteners.

Item No.	Width(mm)	Thickness(mm)	Length(m)
----------	-----------	---------------	-----------

Packing tape

*Good quality packing tape, lightweight with good tear resistance offering consistent and reliable performance.

